

## 96000 series, 3/2 Direct solenoid actuated poppet valve

- Port size: 1/4" (ISO G/NPT)
- Working from 0 bar up
- Short switching times
- Suited for fine vacuum down to 1,33 x 10<sup>-2</sup> mbar
- For a.c. solenoid systems with integrated rectifier (40 ... 60 Hz)
- Variable valve solenoid combination



### Technical features

<p><b>Medium:</b> For neutral gaseous and liquid fluids (with contaminated fluids, upstream installation of a dirt trap is recommended)</p> <p><b>Operation:</b> Direct solenoid operated poppet valve</p> <p><b>Operating pressure:</b> 0 ... 18 bar (0 ... 261 psi)</p>	<p><b>Orifice:</b> 2 ... 5 mm</p> <p><b>Port size:</b> G1/4, 1/4 NPT</p> <p><b>Flow direction:</b> Depending on solenoid system fixed or optional</p> <p><b>Mounting position:</b> Optional, preferably with solenoid on top</p>	<p><b>Ambient/Media temperature:</b> NBR: -25 ... +80°C (-13 ... +176°F) FPM: -10...+120°C (+14 ... +248°F) Water +95°C (+203°F) EDPM: -40... +140°C (-40 ... +284°F) FFPM: -10...+140°C (+14 ... +284°F) Depending on solenoid system and seal materials. Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35°F).</p>	<p><b>Material:</b> Housing: brass 2.0401 (Ms 58) Seals: NBR, others see option selector Inner parts: stainless steel 1.4104 (430 F) brass 2.0401 (Ms 58)</p> <p><b>Further versions</b> Seat seal FPM, EPDM, FFPM; assembled oil and grease-free</p> <p><b>Flow conversion:</b> Cv US Gallon/min (water) = l/min (air) x 0,001 Kv m<sup>3</sup>/h (water) = l/min (air) x 0,000906</p>
---	--	---	---

### Technical data

#### Housing: Brass, Seals: NBR -25 ... +80°C (-13 ... +176°F)

Symbol	Port size	Orifice (mm)	Flow (l/min)	Operating pressure (bar) (psi)		Weight (kg) (lbs)		Dimension No.	Solenoid group	Model *1)
	G 1/4	2	120	0 ... 10	0 ... 145	0,32	0,7	1	13B	9600210
	1/4 NPT	2	120	0 ... 10	0 ... 145	0,32	0,7	1	13B	9603210
	G 1/4	2	120	0 ... 18	0 ... 261	0,52	1,14	1	13D	9600240
	G 1/4	3	200	0 ... 6	0 ... 87	0,32	0,7	1	13C	9600320
	1/4 NPT	3	200	0 ... 6	0 ... 87	0,32	0,7	1	13C	9603320
	G 1/4	3	200	0 ... 14	0 ... 203	0,52	1,14	1	13D	9600340
	1/4 NPT	3	200	0 ... 14	0 ... 203	0,52	1,14	1	13D	9603340
	G 1/4	4	350	0 ... 8	0 ... 116	0,52	1,14	2	16C	9601430
	1/4 NPT	4	350	0 ... 8	0 ... 116	0,52	1,14	2	16C	9604430
	G 1/4	4	350	0 ... 10	0 ... 145	0,52	1,14	1	16D	9601440
	G 1/4	2	100	0 ... 9	0 ... 130	0,5	1,1	3	13B	9602210
	1/4 NPT	2	100	0 ... 9	0 ... 130	0,5	1,1	3	13B	9605210
	G 1/4	3	160	0 ... 9	0 ... 130	0,7	1,54	3	13D	9602340
	1/4 NPT	3	160	0 ... 9	0 ... 130	0,7	1,54	3	13D	9605340
	G 1/4	4	300	0 ... 6	0 ... 87	0,7	1,54	3	16D	9602440
	1/4 NPT	4	300	0 ... 6	0 ... 87	0,7	1,54	3	16D	9605440
	G 1/4	2	120	0 ... 7	0 ... 101	0,32	0,7	1	13D	9600210
	1/4 NPT	2	120	0 ... 7	0 ... 101	0,32	0,7	1	13D	9603210

\*1) When ordering please indicate solenoid, voltage and current type (frequency).

**Option selector**

960X\*\* \* \* \* \* \*

Orifice (mm)	Substitute
2	2
3	3
4	4
5	5
Material seat seal	Substitute
NBR	0
EDPM	1
FPM	2
FFPM	4

Voltage	Substitute
24 V d.c.	02400
230 V a.c.	23050
Solenoid	Substitute
See solenoid table	

### Solenoids group 13B, standard voltages

	Power consumption		Rated current		Protection class IP/NEMA	Ex-Protection (ATEX-Category)	Temperature Ambient/Media (°C)	Electrical connection	Drawing	Circuit diagram	Model
	24 V d.c. (W)	230 V a.c. (VA)	24 V d.c. (mA)	230 V a.c. (mA)					No.	No.	
	8,0	—	331	—	IP65 (with connector)	—	-25 ... +60 Media: +80 max	Connector DIN EN 175301-803, form A *1)	1	1	0246
	—	9,2	—	40	IP65 (with connector)	—	-25 ... +60 Media: +80 max	Connector DIN EN 175301-803, form A *1)	2	7	3206
	8,0	—	331	—	IP65 (with connector)	II 3G Ex nA IIC T4 Gc II 3D Ex tc IIIB T110°C Dc	-20 ... +60	Special connector DIN EN 175301-803 Form A	1	1	3216
	—	9,2	—	40	IP65 (with connector)	II 3G Ex nA IIC T4 Gc II 3D Ex tc IIIB T120°C Dc	-20 ... +60	Special connector DIN EN 175301-803 Form A	2	6	3218
	6,9	—	289	—	IP66	II 2G Ex mb IIC T3 Gb II 2D Ex mb IIIC T135°C Db	-20 ... +60	Cable length 3 m	5	4	0292
	—	8,7	—	34	IP66	II 2G Ex mb IIC T3 Gb II 2D Ex mb IIIC T140°C Db	-20 ... +60	Cable length 3 m	5	7	0293
	3,9	—	162	—	IP66 (with cable gland)	II 2G Ex eb mb IIC T4/ T6 Gb  II 2D Ex tb IIIC T130°C Db	T4: -40 ...+80 T6: -40 ... +55 -40 ...+80	M20 x 1,5 *1)	6	4	4210
	—	5,3	—	23	IP66 (with cable gland)	II 2G Ex eb mb IIC T4/ T6 Gb  II 2D Ex tb IIIC T130°C Db	T4: -40 ...+80 T6: -40 ... +55 -40 ...+80	M20 x 1,5 *1)	6	7	4211
	3,9	—	162	—	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ...+80 T6: -40 ... +55 -40 ...+80	1/2 NPT *1)	7	20	4610
	—	5,3	—	23	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ...+80 T6: -40 ... +55 -40 ...+80	1/2 NPT *1)	7	21	4611
	3,9	—	162	—	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ...+80 T6: -40 ... +55 -40 ...+80	M20 x 1,5 *1)	7	20	4612
	—	5,3	—	23	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ...+80 T6: -40 ... +55 -40 ...+80	M20 x 1,5 *1)	7	21	4613
	5,5	—	228	—	4x	Cl. I, Div. 1, Gr. A - D Cl. II/III, Div. 1, Gr. E - G T3C (160°C)	-20 ... +60	Flying leads length 460 mm	8	1	3722
	—	5,9	—	26	4x	Cl. I, Div. 1, Gr. A - D Cl. II/III, Div. 1, Gr. E - G T3C (160°C)	-20 ... +60	Flying leads length 460 mm	8	5	3723

Standard voltages (±10%) 24 V d.c., 230 V a.c., other voltages on request. Design according to VDE 0580, EN 50014/50028. 100% duty cycle.

\*1) Connector/cable gland is not scope of delivery, see table »Accessories

Attention: The protection class for coil series 46xx and 48xx is determined by the choice of cable gland.

Example: if an ATEX-certified cable gland is used that has Ex d type of protection, the solenoid will have the protection class Ex d mb; if a cable gland with Ex e type of protection is used, the solenoid will have protection class Ex e mb.

### Approvals

Model	Approvals ATEX	IECEX	FM	Datasheet	Model	Approvals ATEX	IECEX	Datasheet
029x	KEMA 02 ATEX 1347 X	IECEX DEK 13.0014X	—	N/en 7.1.505	42xx	KEMA 98 ATEX 4452 X	IECEX KEM 09.0068X	N/en 7.1.580
321x, 381x	EC-Declaration of Conformity	—	—	N/en 7.1.570	46xx	PTB 02 ATEX 2085 X	IECEX PTB 11.0094X	N/en 7.1.585
372x, 382x	—	—	CSA-LR 57643-6	N/en 7.1.575				

## Solenoids group 13C, standard voltages

	Power consumption		Rated current		Protection class IP/NEMA	Ex-Protection (ATEX-Category)	Temperature Ambient/Media (°C)	Electrical connection	Drawing	Circuit diagram	Model
	24 V d.c. (W)	230 V a.c. (VA)	24 V d.c. (mA)	230 V a.c. (mA)					No.	No.	
	12,1	—	504	—	IP65 (with connector)	—	-25 ... +60 Media: +80 max	Connector DIN EN 175301-803, form A *1)	1	1	0200
	—	11,3	—	49	IP65 (with connector)	—	-25 ... +60 Media: +80 max	Connector DIN EN 175301-803, form A *1)	2	6	3204
	12,1	—	504	—	IP65 (with connector)	II 3G Ex nA IIC T4 Gc II 3D Ex tc IIIB T130°C Dc	-20 ... +60	Special connector DIN EN 175301-803 Form A	1	1	3217
	—	11,3	—	49	IP65 (with connector)	II 3G Ex nA IIC T4 Gc II 3D Ex tc IIIB T120°C Dc	-20 ... +50	Special connector DIN EN 175301-803 Form A	2	6	3219
	10,7	—	446	—	IP66	II 2G Ex mb IIC T3 Gb II 2D Ex mb IIIC T155°C Db	-20 ... +40	Cable length 3 m	5	4	0290
	—	12,4	—	54	IP66	II 2G Ex mb IIC T3 Gb II 2D Ex mb IIIC T155°C Db	-20 ... +40	Cable length 3 m	5	7	0291
	8,9	—	369	—	IP66 (with cable gland)	II 2G Ex eb mb IIC T4/ T5 Gb  II 2D Ex tb IIIC T130°C Db	T4: -40 ... +65 T5: -40 ... +55 -40 ... +65	M20 x 1,5 *1)	6	4	4220
	—	10,0	—	43	IP66 (with cable gland)	II 2G Ex eb mb IIC T4/ T5 Gb  II 2D Ex tb IIIC T130°C Db	T4: -40 ... +65 T5: -40 ... +55 -40 ... +65	M20 x 1,5 *1)	6	7	4221
	8,9	—	369	—	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +70 T6: -40 ... +40  -40 ... +70	1/2 NPT *1)	7	20	4620
	—	10,0	—	43	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +70 T6: -40 ... +40  -40 ... +70	1/2 NPT *1)	7	21	4621
	8,9	—	369	—	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +70 T6: -40 ... +40  -40 ... +70	M20 x 1,5 *1)	7	20	4622
	—	10,0	—	43	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +70 T6: -40 ... +40  -40 ... +70	M20 x 1,5 *1)	7	21	4623
	8,9	—	369	—	4x	Cl. I, Div. 1, Gr. A - D Cl. II/III, Div. 1, Gr. E - G T3C (160°C)	-20 ... +60	Flying leads length 460 mm	8	1	3724
	—	9,5	—	41	4x	Cl. I, Div. 1, Gr. A - D Cl. II/III, Div. 1, Gr. E - G T3C (160°C)	-20 ... +60	Flying leads length 460 mm	8	5	3725

Standard voltages (±10%) 24 V d.c., 230 V a.c., other voltages on request. Design according to VDE 0580, EN 50014/50028. 100% duty cycle.

\*1) Connector/cable gland is not scope of delivery, see table »Accessories


Attention: The protection class for coil series 46xx and 48xx is determined by the choice of cable gland.

Example: if an ATEX-certified cable gland is used that has Ex d type of protection, the solenoid will have the protection class Ex d mb; if a cable gland with Ex e type of protection is used, the solenoid will have protection class Ex e mb.

## Approvals

Model	Approvals ATEX	IECEX	FM	Datasheet	Model	Approvals ATEX	IECEX	Datasheet
029x	KEMA 02 ATEX 1347 X	IECEX DEK 13.0014X	—	N/en 71.505	42xx	KEMA 98 ATEX 4452 X	IECEX KEM 09.0068X	N/en 71.580
321x, 381x	EC-Declaration of Conformity	—	—	N/en 71.570	46xx	PTB 02 ATEX 2085 X	IECEX PTB 11.0094X	N/en 71.585
372x, 382x	—	—	CSA-LR 57643-6	N/en 71.575				

## Solenoids group 13D, standard voltages

	Power consumption		Rated current		Protection class IP/NEMA	Ex-Protection (ATEX-Category)	Temperature Ambient/Media (°C)	Electrical connection	Drawing No.	Circuit diagram No.	Model
	24 V d.c. (W)	230 V a.c. (VA)	24 V d.c. (mA)	230 V a.c. (mA)							
	16,9	—	703	—	IP65 (with connector)	—	-25 ... +60 Media: +80 max	Connector DIN EN 175301-803, form A *1)	3	1	0700
	—	19,5	—	75	IP65 (with connector)	—	-25 ... +60 Media: +80 max	Connector DIN EN 175301-803, form A *1)	4	6	3703
	11,4	—	475	—	IP66 (with cable gland)	II 2G Ex eb mb IIC T4/ T5 Gb  II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	M20 x 1,5 *1)	6	4	4230
	—	15,2	—	66	IP66 (with cable gland)	II 2G Ex eb mb IIC T4/ T5 Gb  II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	M20 x 1,5 *1)	6	7	4231
	11,4	—	475	—	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	1/2 NPT *1)	7	20	4630
	—	15,2	—	66	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	1/2 NPT *1)	7	21	4631
	11,4	—	475	—	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	M20 x 1,5 *1)	7	20	4632
	—	15,2	—	66	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	M20 x 1,5 *1)	7	21	4633
	13,6	—	567	—	4x	Cl. I, Div. 1, Gr. A - D Cl. II/III, Div. 1, Gr. E - G T3C (160°C)	-20 ... +60	Flying leads length 460 mm	8	1	3726
	—	15,7	—	68	4x	Cl. I, Div. 1, Gr. A - D Cl. II/III, Div. 1, Gr. E - G T3C (160°C)	-20 ... +60	Flying leads length 460 mm	8	5	3727

Standard voltages ( $\pm 10\%$ ) 24 V d.c., 230 V a.c., other voltages on request. Design according to VDE 0580, EN 50014/50028. 100% duty cycle.

\*1) Connector/cable gland is not scope of delivery, see table »Accessories






Attention: The protection class for coil series 46xx and 48xx is determined by the choice of cable gland.

Example: if an ATEX-certified cable gland is used that has Ex d type of protection, the solenoid will have the protection class Ex d mb; if a cable gland with Ex e type of protection is used, the solenoid will have protection class Ex e mb.

## Approvals

Model	Approvals ATEX	IECEX			Datasheet
		IECEX	FM	FM	
321x, 381x	EC-Declaration of Conformity	—	—	—	N/en 71.570
372x, 382x	—	—	—	CSA-LR 57643-6	N/en 71.575
42xx	KEMA 98 ATEX 4452 X	IECEX KEM 09.0068X	—	—	N/en 71.580
46xx	PTB 02 ATEX 2085 X	IECEX PTB 11.0094X	—	—	N/en 71.585

## Solenoids group 16C, standard voltages

	Power consumption		Rated current		Protection class IP/NEMA	Ex-Protection (ATEX-Category)	Temperature Ambient/Media (°C)	Electrical connection	Drawing	Circuit diagram	Model
	24 V d.c. (W)	230 V a.c. (VA)	24 V d.c. (mA)	230 V a.c. (mA)					No.	No.	
	6,8	—	284	—	IP65 (with connector)	—	-25 ... +60	Connector DIN EN 175301-803, form A *1)	2	1	0827
	—	10,6	—	46	IP65 (with connector)	—	-25 ... +60	Connector DIN EN 175301-803, form A *1)	3	6	3805
	8,9	—	369	—	IP66 (with cable gland)	II 2G Ex eb mb IIC T4/ T5 Gb	T4: -40 ... +65 T5: -40 ... +55 -40 ... +65	M20 x 1,5 *1)	6	4	4270
	—	10,0	—	43	IP66 (with cable gland)	II 2G Ex eb mb IIC T4/ T5 Gb	T4: -40 ... +65 T5: -40 ... +55 -40 ... +65	M20 x 1,5 *1)	6	7	4271
	8,9	—	369	—	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIC T130°C Db	T4: -40 ... +70 T6: -40 ... +40 -40 ... +70	1/2 NPT *1)	7	20	4670
	—	10,0	—	43	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIC T130°C Db	T4: -40 ... +70 T6: -40 ... +40 -40 ... +70	1/2 NPT *1)	7	21	4671
	8,9	—	369	—	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIC T130°C Db	T4: -40 ... +70 T6: -40 ... +40 -40 ... +70	M20 x 1,5 *1)	7	20	4672
	—	10,0	—	43	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIC T130°C Db	T4: -40 ... +70 T6: -40 ... +40 -40 ... +70	M20 x 1,5 *1)	7	21	4673
	8,9	—	369	—	4x	Cl. I, Div. 1, Gr. A - D Cl. II/III, Div. 1, Gr. E - G T3C (160°C)	-20 ... +60	Flying leads length 460 mm	8	1	3824
	—	9,5	—	41	4x	Cl. I, Div. 1, Gr. A - D Cl. II/III, Div. 1, Gr. E - G T3C (160°C)	-20 ... +60	Flying leads length 460 mm	8	5	3825

Standard voltages (±10%) 24 V d.c., 230 V a.c., other voltages on request. Design according to VDE 0580, EN 50014/50028. 100% duty cycle.

\*1) Connector/cable gland is not scope of delivery, see table »Accessories

Attention: The protection class for coil series 46xx and 48xx is determined by the choice of cable gland.

Example: if an ATEX-certified cable gland is used that has Ex d type of protection, the solenoid will have the protection class Ex d mb; if a cable gland with Ex e type of protection is used, the solenoid will have protection class Ex e mb.

## Approvals

Model	Approvals			Datasheet
	ATEX	IECEX	FM	
372x, 382x	—	—	CSA-LR 57643-6	N/en 71.575
42xx	KEMA 98 ATEX 4452 X	IECEX KEM 09.0068X	—	N/en 71.580
46xx	PTB 02 ATEX 2085 X	IECEX PTB 11.0094X	—	N/en 71.585

## Solenoids group 16D, standard voltages

	Power consumption		Rated current		Protection class IP/NEMA	Ex-Protection (ATEX-Category)	Temperature Ambient/Media (°C)	Electrical connection	Drawing No.	Circuit diagram No.	Model
	24 V d.c. (W)	230 V a.c. (VA)	24 V d.c. (mA)	230 V a.c. (mA)							
	16,9	—	703	—	IP65 (with connector)	—	-25 ... +60 Media: +80 max	Connector DIN EN 175301-803, form A *1)	3	1	0800
	—	17,3	—	75	IP65 (with connector)	—	-25 ... +60 Media: +80 max	Connector DIN EN 175301-803, form A *1)	4	6	3803
	16,9	—	703	—	IP65 (with connector)	II 3G Ex nA IIC T4 Gc II 3D Ex tc IIIB T130°C Dc	-20 ... +55	Special connector DIN EN 175301-803 Form A	3	1	3817
	—	17,3	—	75	IP65 (with connector)	II 3G Ex nA IIC T4 Gc II 3D Ex tc IIIB T130°C Dc	-20 ... +45	Special connector DIN EN 175301-803 Form A	4	6	3819
	11,4	—	475	—	IP66 (with cable gland)	II 2G Ex eb mb IIC T4/ T5 Gb  II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	M20 x 1,5 *1)	6	4	4280
	—	15,2	—	66	IP66 (with cable gland)	II 2G Ex eb mb IIC T4/ T5 Gb  II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	M20 x 1,5 *1)	6	7	4281
	11,4	—	475	—	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	1/2 NPT *1)	7	20	4680
	—	15,2	—	66	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	1/2 NPT *1)	7	21	4681
	11,4	—	475	—	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	M20 x 1,5 *1)	7	20	4682
	—	15,2	—	66	IP66 (with cable gland)	II 2G Ex db mb IIC T4/ T6 Gb II 2G Ex eb mb IIC T4/ T6 Gb II 2D Ex tb IIIC T130°C Db	T4: -40 ... +50 T5: -40 ... +40 -40 ... +50	M20 x 1,5 *1)	7	21	4683
	13,6	—	567	—	4x	Cl. I, Div. 1, Gr. A - D Cl. II/III, Div. 1, Gr. E - G T3C (160°C)	-20 ... +60	Flying leads length 460 mm	8	1	3826
	—	15,7	—	68	4x	Cl. I, Div. 1, Gr. A - D Cl. II/III, Div. 1, Gr. E - G T3C (160°C)	-20 ... +60	Flying leads length 460 mm	8	5	3827

Standard voltages ( $\pm 10\%$ ) 24 V d.c., 230 V a.c., other voltages on request. Design according to VDE 0580, EN 50014/50028. 100% duty cycle.

\*1) Connector/cable gland is not scope of delivery, see table »Accessories

Attention: The protection class for coil series 46xx and 48xx is determined by the choice of cable gland.

Example: if an ATEX-certified cable gland is used that has Ex d type of protection, the solenoid will have the protection class Ex d mb; if a cable gland with Ex e type of protection is used, the solenoid will have protection class Ex e mb.

## Approvals

Model	Approvals ATEX	Datashet	
		IECEX	FM
372x, 382x	—	—	CSA-LR 57643-6 N/en 71.575
42xx	KEMA 98 ATEX 4452 X	IECEX KEM 09.0068X	— N/en 71.580
46xx	PTB 02 ATEX 2085 X	IECEX PTB 11.0094X	— N/en 71.585

## Partnumbers for international approval

Land/Approval	Coil/Code	029x	321x/381x	372x/382x	42xx	46xx	48xx
Europa/ATEX	Standard	x	x	-	x	x	x
International/IECEX	Standard	x	x	-	x	x	x
China/NEPSI	-01	-	-	-	x	x	-
Brasilien/INMETRO	-02	-	-	-	x	x	-
Korea/KOSHA (only gas approval)	-03	-	-	-	x	x	x
Russland, Kasachstan & Weißrussland/TR-CU 012	-04	x	-	-	x	x	x
Indien/CCOE	Standard	-	-	-	x	x	-
Taiwan/ITRI	Standard	-	-	-	x	x	-
USA/FM	Standard	-	-	x	-	-	-
Kanada/CSA	Standard	-	-	x	-	-	-

Example: 000000427002400-04  
(Coil: 4270; Voltage: 24V DC; Approval: TR-CU 012)

## Accessories

### Electrical connection



Page 11

For sole-noid	Thread	Cable Ø (mm)	Material	Protection class (ATEX)	Ambient temperatur limitation *1)	Model
42xx	M20 x 1,5	7,0 ... 12,0	Plastic	II 2G Ex e / II 2D Ex t	See table	0589735
42xx	M20 x 1,5	10,0 ... 14,0	Plastic	II 2G Ex e / II 2D Ex t	See table	0589736
42xx	M20 x 1,5	6,0 ... 12,0	Plastic	II 2G Ex e / II 2D Ex t	See table	0589737
42xx	M20 x 1,5	5,0 ... 10,0	Plastic	II 2G Ex e / II 2D Ex t	See table	0589739
46xx	M20 x 1,5	5,0 ... 14,0	Nickel plated brass	II 2G Ex e / II 2D Ex t	-	0589654
46xx	M20 x 1,5	10,0 ... 14,0	Nickel plated brass	II 2G Ex d / II 2D Ex t	-	0588851
46xx	1/2 NPT	7,5 ... 11,9	Nickel plated brass	II 2G Ex d / II 2D Ex t	-	0588925
46xx, 48xx	M20 x 1,5	9,0 ... 13,0	Stainless steel 1.4571	II 2G Ex e / II 2D Ex t	-	0589385
46xx, 48xx	M20 x 1,5	7,0 ... 12,0	Stainless steel 1.4404	II 2G Ex d / II 2D Ex t	-	0589395
46xx, 48xx	M20 x 1,5	10,0 ... 14,0	Stainless steel 1.4404	II 2G Ex d / II 2D Ex t	-	0589387

\*1) The limitation of the temperature range to the mentioned range is due to the self-heating of the solenoid.

For sole-noid	Ambient temperatur limitation solenoid 42xx		
	0589735 & 0589736 *2)	0589737	0589739 *2)
421x/426x	T4 & Dust Ex: -35°C ... + 80°C T6: -35°C ... + 55°C	T4 & Dust Ex: -40°C...+ 65°C T6: -40°C...+ 55°C	T4 & Dust Ex: -40...+78°C T6: -40...+55°C
422x/427x	T4 & Dust Ex: -35°C +65°C T5: -35°C + 55°C	T4 & Dust Ex: -40°C...+ 62°C T5: -40°C + 55°C	T4 & Dust Ex: -40...+65°C T5: -40...+55°C
423x/428x	T4 & Dust Ex: -35°C...+50°C T5: -35°C...+40°C	T4 & Dust Ex: -40°C...+50°C T5: -40°C...+40°C	T4 & Dust Ex: -40...+50°C T5: -40...+40°C

\*2) Tested for the lower level of mechanical risk (4 joule), an additional protection against impacts might be needed.






Drawings -  
Valve


Dimensions in mm  
Projection/First angle




①

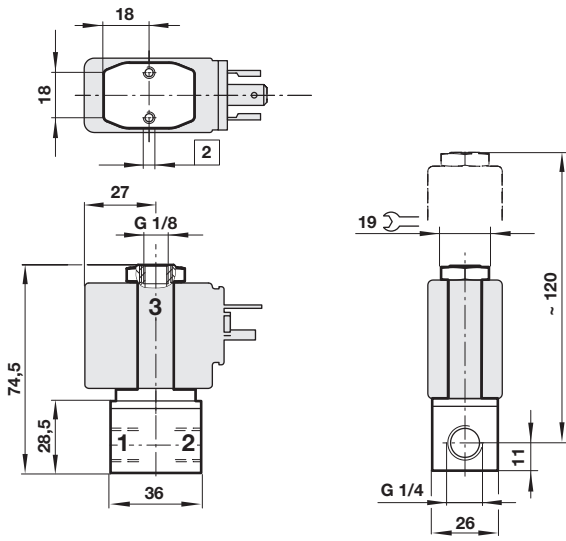

②

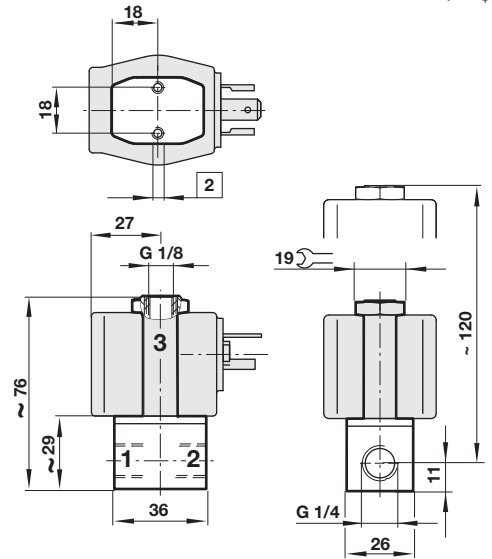

③

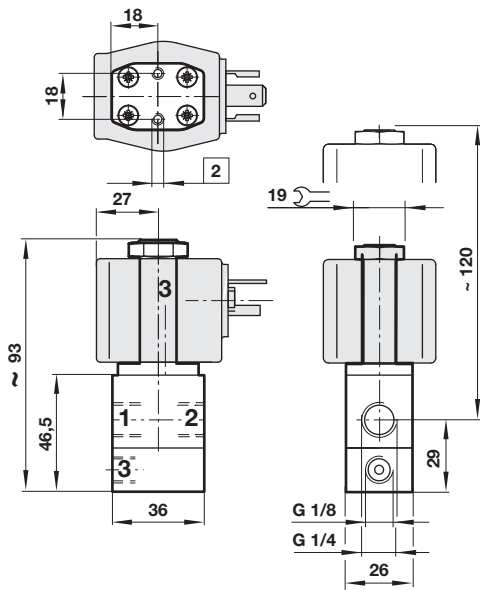


② M4 x 6 mm  
deep

### Drawings - Solenoid


Dimensions in mm  
Projection/First angle




**1** Weight: 0,15 kg

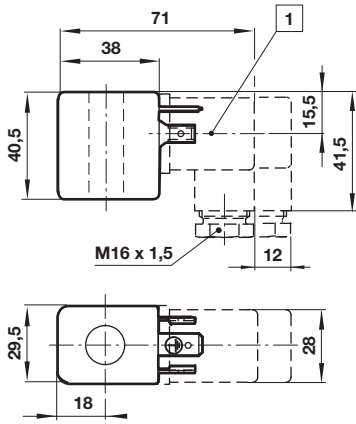


**2** Weight: 0,16 kg

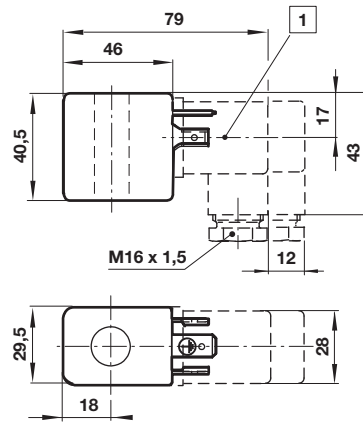


**3** Weight: 0,27 kg

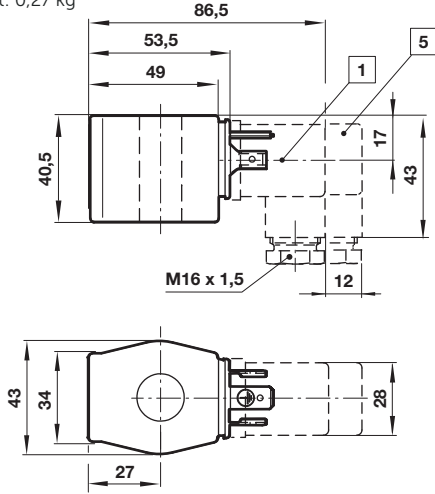


**4** Weight: 0,32 kg

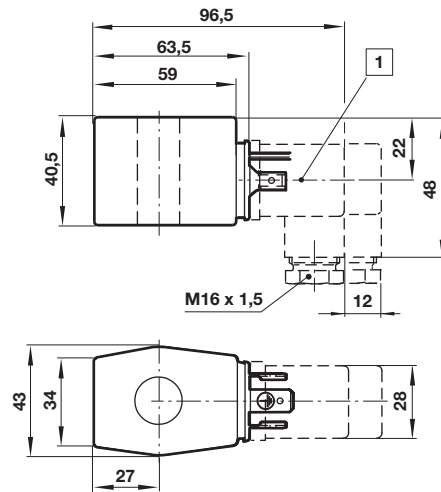



**5** Weight: 0,5 kg

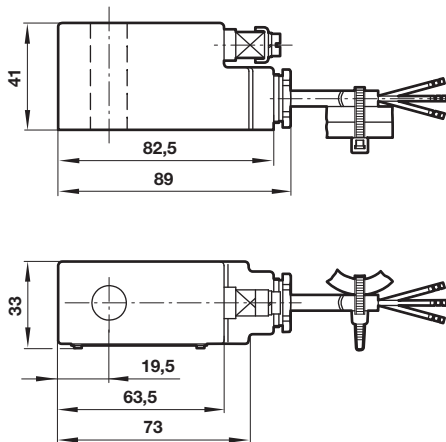


**6** Weight: 0,4 kg

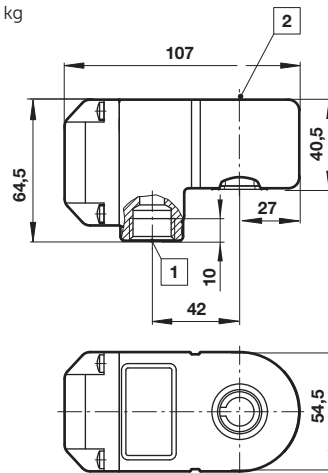


- 1** Connector can be indexed by 4x90°
- 2** Ø 16 or 13 (with spacer tube)

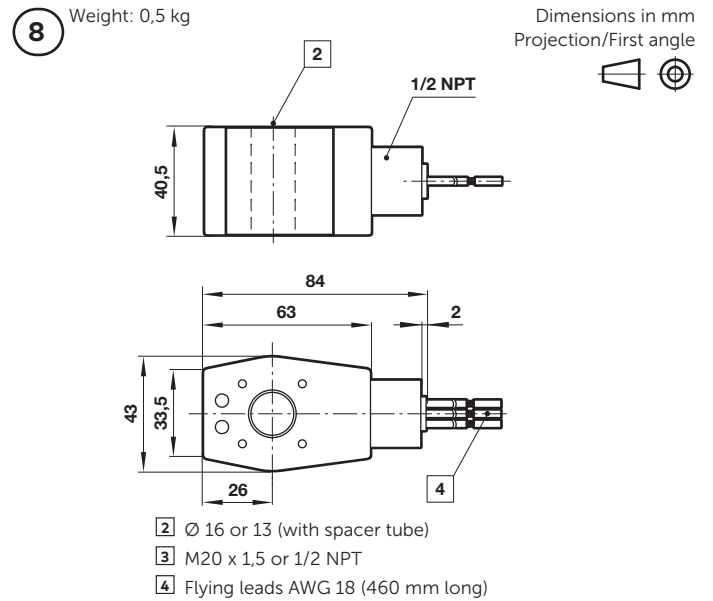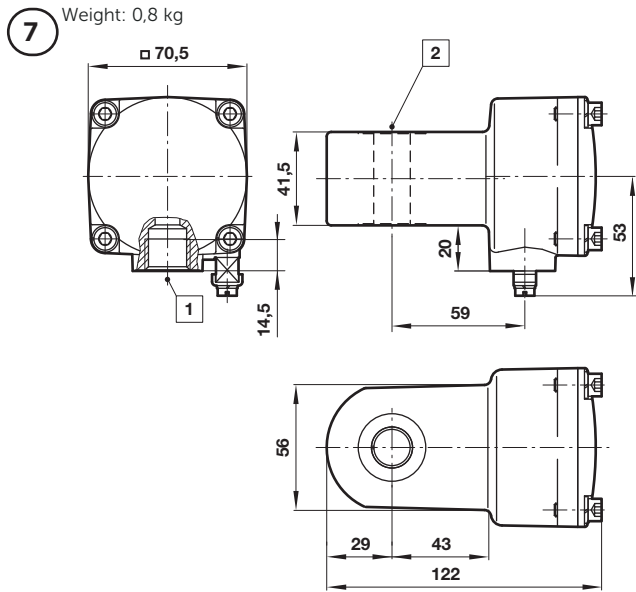

### Circuit diagrams

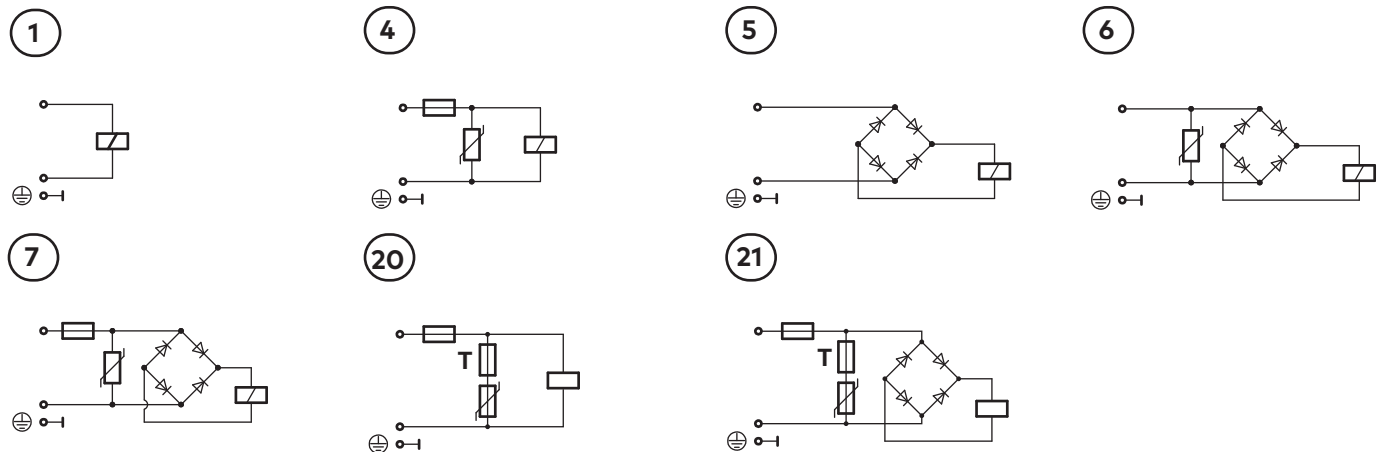

### Cable gland

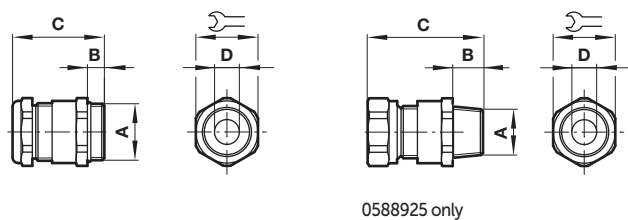

A	B	C	ø D		Model
M20 x 1,5	10	40	7,0 ... 12,0	24	0589735
M20 x 1,5	10	43	10,0 ... 14,0	27	0589736
M20 x 1,5	10	40	6,0 ... 12,0	24	0589737
M20 x 1,5	10	39,5	5,0 ... 10,0	24	0589739
M20 x 1,5	6,5	35,5	5,0 ... 14,0	24	0589654
M20 x 1,5	12	37	9,0 ... 14,0	30	0588851
1/2 NPT	15	58	7,5 ... 11,9	24	0588925
M20 x 1,5	6,5	27,5	9,0 ... 13,0	22	0589385
M20 x 1,5	16	40	7,0 ... 12,0	24	0589395
M20 x 1,5	16	41	10,0 ... 14,0	24	0589387

### Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features/ data**«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Norgren.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.